





ASSOCIATED PRODUCTS

ACOUSTIC NOISE COVERS

- REDUCE ACOUSTIC NOISE LEVELS
- AVAILABLE IN ECO AND PREMIUM VERSIONS
- CUSTOM BUILT
- HEAVY DUTY
- SOUND PROOFING
- PNEUMATIC OR MANUAL CONTROL AVAILABLE
- FREE STANDING OR ATTACHED
- IMPROVE EMPLOYEE HEALTH
- REDUCE EMPLOYEE ABSENTEEISM



CONTROL PANELS




- BASIC ON/OFF SWITCHES
- OPTIONAL TIMERS
- OPTIONAL AUTOMATIC CONTROLS
- OPTIONAL LIGHT DISPLAY
- OPTIONAL REVERSE
- OPTIONAL SPEED CONTROL
- OPTIONAL WATER CONTROL
- OPTIONAL PLC CONTROL
- EMERGENCY STOP



IS YOUR WORKSHOP TOO NOISY?

Our acoustic noise covers are designed to combat noise pollution. They can be free standing or attached to the machine, they are mainly used to absorb and reduce the noise by a considerable factor.

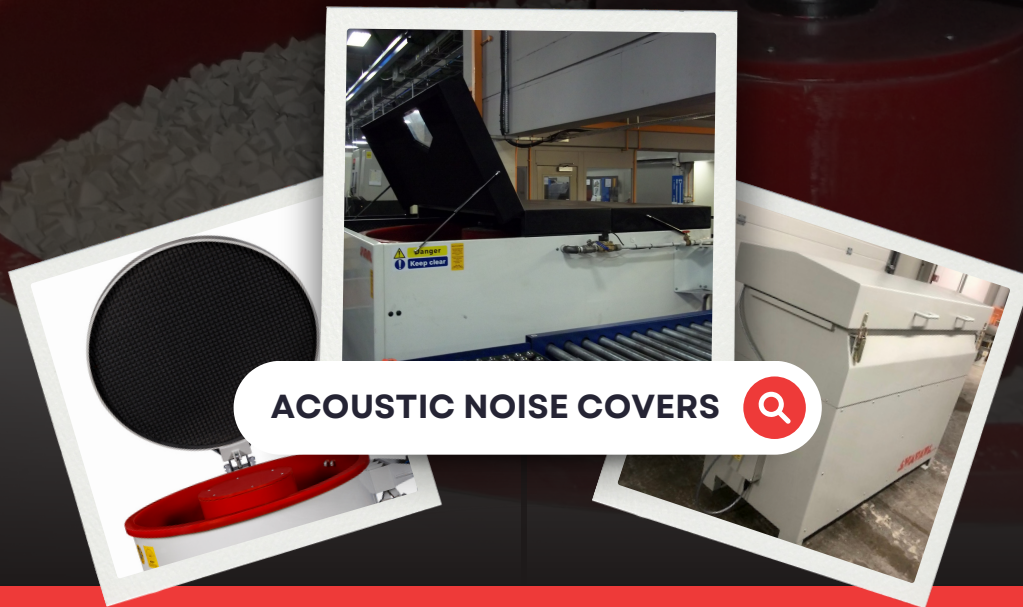

Improving Employee Health

Noise pollution can cause a number of health problems, including hearing loss, tinnitus, stress, and high blood pressure. By reducing noise pollution, employers can help to improve the health of their employees.

Reduced Employee Absenteeism

Noise pollution can make it difficult to concentrate and can lead to fatigue. By reducing noise pollution, employers can help to reduce employee absenteeism and improve productivity.

LIQUID COMPOUND DOSING UNITS



- ANALOGIC SOLENOID DRIVEN DOSING PUMP
- CONSTANT FLOW RATE (FLOW RATE IN %)
- 3 DIFFERENT SELECTABLE PERFORMANCE SETUP
- WALL MOUNTING BRACKET SUPPLIED WITH INSTALLATION KIT
- POWER SUPPLY 100÷240VAC - 50/60HZ
- IP65 PROTECTION DEGREE
- STROKES FREQUENCY PERCENTAGE SETTING
- FLOW RATE SETTING FROM 0-100% OR FROM 0-20%
- REINFORCED PP HOUSING, SUITABLE FOR AGGRESSIVE WORKING
- FREE COMMISSIONING

WASTE WATER TRANSFER PUMP

- 600 WATT, 230V MOTOR
- 195LTR/MIN MAX FLOW RATE
- MAX HEAD HEIGHT 9M
- PUMP OUTLET 1¼" BSP
- PUMPS AS LOW AS 3MM FROM THE FLOOR
- 10M LONG POWER CABLE
- COMPLETE WITH 1" AND ¾" MULTI-STEP HOSE ADAPTER
- TOUGH DURABLE BUILD
- SUITABLE FOR CLEAN WATER APPLICATIONS
- EN 60335-2-4:2003+A2:2010, EN 60335-1:2012+A11:2014



FILTRATION WEIR TANK



- REMOVE THE SILT CONTAMINANTS
- UNWANTED WASTE WATER DISCHARGED
- 1.5MM THICK GALVANISED STEEL
- DRAIN PLUG & BUNG COME AS STANDARD
- ROLL TOP FOR STRENGTH & STABILITY
- 915MM LENGTH - 163LTR CAPACITY
- 1220MM LENGTH - 218LTR CAPACITY
- 457MM WIDTH
- 405MM DEEP
- BSEN ISO 1461

