



CENTRIFUGAL DRYING & DEGREASING MACHINES

CENTRIFUGAL DRYING & DEGREASING




OUR PROMISE, NO EXTRA CHARGE, INCLUDED IN THE PRICE.

We thrive for success, which is why we insist on coming to you to train your staff, check the installation, and make sure that the processes are working correctly so you are achieving the desired and approved results. We would not offer you anything without approval.


- You will receive free pre-site visit and installation check.
- You will receive a free component assessment.
- We will develop a process which is then approved by you, which is tailored to your specific needs.
- You will learn how to use the machinery safely and efficiently.
- You will be able to ask questions and get personalised training from our experts.
- We will provide after sales consultancy and future project development support.
- We will provide machinery back up support from our experienced team of engineers.

We believe that our free promises are an essential part of our customer service. It is our way of showing you that we are committed to your success for the long run.

Our tilting centrifugal dryers are ideal for drying metal and plastic articles that are not excessively delicate and do not require pickling or polishing. They are robust yet easy to use, with innovative features such as a lever-operated unloading and tilting system. The fixed basket is made of drilled AISI 304 stainless steels with a hole diameter of 2 mm (0.9 mm available on request). The control panel features a cycle timer, centrifugation switch, and heating switch.



COMPONENTS SPIN
DRY WITH FORCED
WARM AIR.



UNLOADING AND
TILTING ACTION
THROUGH A LEVER.



DRY METAL AND
PLASTIC

DRYING & DEGREASING

FIXED BASKET



SK25


INDUSTRIES:

- Automotive
- Aerospace
- Medical
- Jewellery
- Electronics
- Plastics
- Optics
- Defence
- Additive Manufacturing



BENEFITS:

- High-Energy Process
- Control Panel
- Cycle Timer
- Centrifugation Switch
- Batch Processing
- Reduced Labour Costs
- Heating Switch
- Precise Control
- Reduced Processing Time

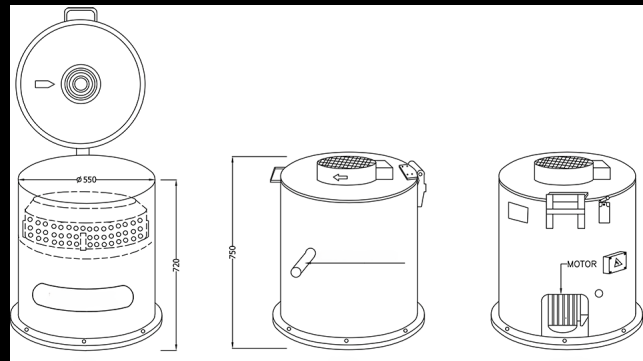

	SK25 Y	SK50 Y	SK25 K	SK50 K
Capacity (kg)	33	46	33	46
Basket Inner Diameter (mm)	420	470	420	470
Width (mm)	645	710	645	710
Length (mm)	750	835	750	835
Height (mm)	685	835	765	835
Centrifugal Cycle (RPM)	600	600	500	500
Motor Power (kW)	0,55	0,55	0,55	0,55
Motor Cycle at 50 Hz (RPM)	1500	1500	1500	1500
Heating Power (kW)	-	-	2	2
Total Power (kW)	0,55	0,55	2,55	2,55
Weight	133	150	138	155

	ASC 50/LR	ASC 70/LR
Internal basket Dimensions (mm)	25	50
Theoretical Volume (litres)	415	445
Capacity (kg)	200	200
RPM	360	370
Heating Elements (W)	645	710
Motor Power (W)	650	720
Total Installed Power (W)	920	985
Overall Dimensions (mm)	140	160
Unloading Opening (mm)	1500	1500
Weight (kg)	480	480



ASC 50/LR

IF YOU ARE LOOKING FOR A RELIABLE AND EFFICIENT WAY TO DRY METAL AND PLASTIC COMPONENTS, OUR TILTING CENTRIFUGAL DRYERS ARE THE PERFECT SOLUTION FOR YOU.